


Assembly


For indoor installation

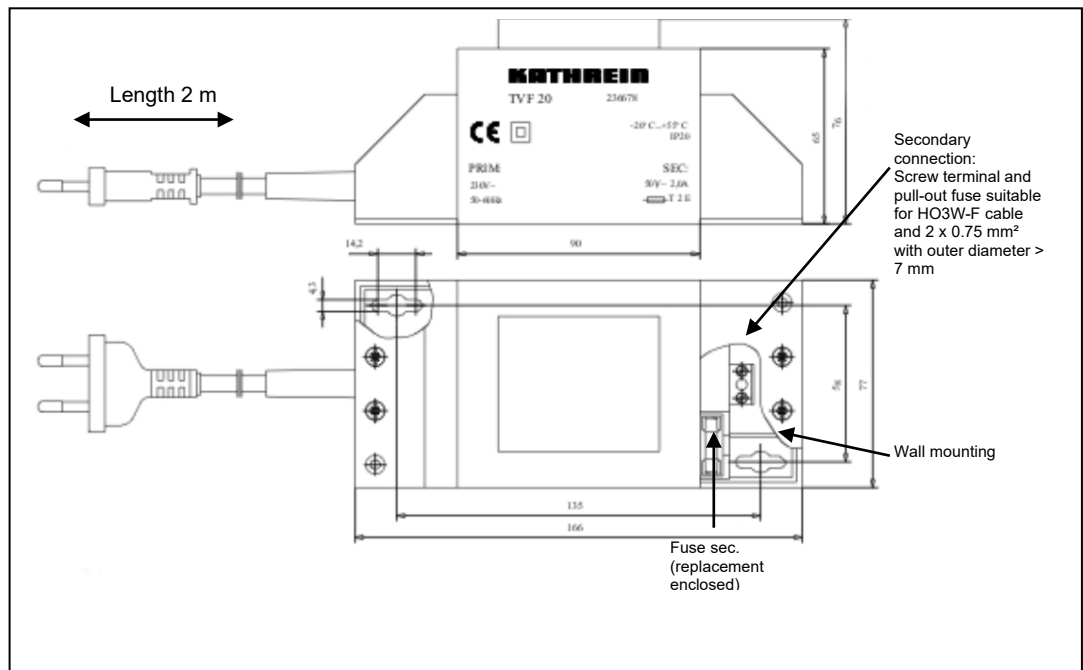

Technical data

Primary input voltage	V~/Hz	230/50-60
Power consumption at full load	W	typ. 113
Secondary output voltage at full load	V~	50 (ground free)
Maximum secondary current draw	A	2
Ambient temperature	C°	-20 ... +55
Safety fuse secondary (only use type no. 19196 from Wickmann)		T2E
Protection class		IP 20
Device safety		EN 60065 EN 61558
Overload protection		by means of temperature switch (mains-side interruption in the event of overload, automatic restart after cooling down)
Short-circuit protection		via fuse secondary
Weight	kg	~ 2,2
CE		

Load curve

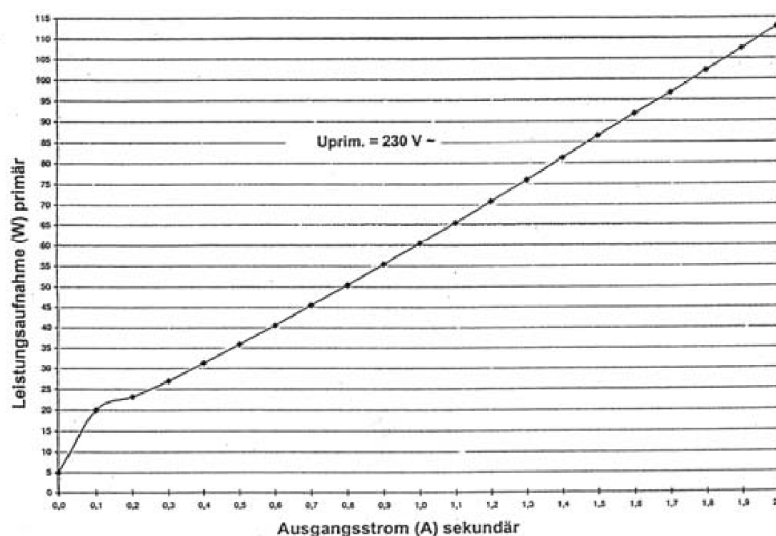

Electronic devices do not belong in household waste, but must be disposed of properly in accordance with Directive 2002/96/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on waste electrical and electronic equipment. At the end of its useful life, please dispose of this appliance at the designated public collection points.