


Order number: 2050000001

Open text field 1:



- Multi-switch for distribution of eight satellite frequency planes to 16 subscribers in a 19" unit
- Ideal for combination with the UFG 810 UFOcompact plus® base unit in a 19" cabinet
- Independent horizontal/vertical, low/high, sat position A/B selection from every receiver using DiSEqC™ controller
- When not using a DiSEqC™ controller, horizontal/vertical, low/high switching is possible from sat position A, with tone burst also sat position A/B
- Built-in amplifier for low connection losses in the satellite range
- Built-in pre-emphasis for equalisation of cable attenuation
- Loop-through, e.g. for terrestrial signals
- High decoupling between outputs
- Second DC connection for redundant power supply unit (NCF 18)
- Height: Two HU for 19" cabinet or wall mounting
- Terrestrial range: 5-862 MHz- passive
- LNB remote feeding via horizontal low inputs with NCF 18 external power supply unit. All other inputs are voltage-free (enabling operation with UAS 585)
- For indoor installation

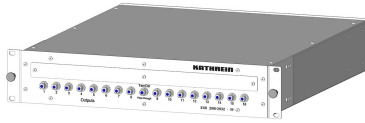

Hersteller: Kathrein

EXR 2916-19"**Product information "EXR 2916-19"**

19 inch multi-switch 9 to 16 - 5-862 and 8 x 950-2150 MHz - 16 subscriber connections - Pre-emphasis - DiSEqC controller

Type:	EXR 2916-19"
Order no.:	2050000001
Subscriber connections:	16
Inputs:	1 x terr./8 x Sat IF
Frequency ranges:	5-862/950-2150 MHz
Output connection loss ¹⁾ :	1-16
Horiz./vert. decoupling:	25 dB
Max. output level ²⁾ :	109 dBμV
Control using DiSEqC™:	Vert./horiz., low/high, Pos. A/B
Control without DiSEqC™ with 14/18 V and 0/22 kHz:	Vert./horiz., low/high, (pos. A)
Control without DiSEqC™ with tone burst:	Pos. A/B
Current drain per subscriber:	30 mA
Dimensions (W x H x D):	482,6 (438) x 88,1 x 480 mm
Weight approx.:	7,6 kg

¹⁾ Frequency-dependent attenuation

²⁾ In accordance with EN 60728-3, 35 dB IMA

Mehr Bilder zu "EXR 2916-19"

