


Order number: 21210023

Open text field 1:

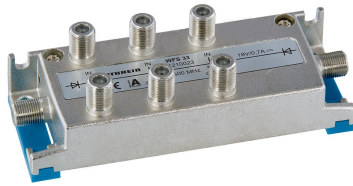

3-way remote feed diplexer with F connectors

For remote feeding of up to three UAS 584 universal quadro feed systems, e.g. for use with UFG 4xx UFO compact base units in conjunction with the NCF 18 switched-mode power supply unit (not included)

Capacitively isolated outputs

For indoor installation

CE

Class A

Hersteller: Kathrein

WFS 33

Product information "WFS 33"

Remote feeding diplexer 5-2400 MHz, F connectors, remote feeding: max. 18 V; 0.7 A

Type:	WFS 33
Order no.:	21210023
Through loss Sat-IF:	1 dB
Frequency range:	5-2400 MHz
Through loss VHF/UHF:	0.4 dB
Remote power feed, DC:	18 V
Nominal impedance:	75 Ω
Remote feed current DC:	Max. 700 mA
Connections:	F connectors
Dimensions:	118 x 36 x 43 mm
Packaging unit/weight:	1 (10, 200)/0.2 pc/kg

Mehr Bilder zu "WFS 33"

